

预装式变电站

Prefabricated Substation

QRE 杭州钱江电气集团股份有限公司
Hangzhou Qiantang River Electric Group Co., Ltd.

地址：中国杭州市萧山钱江电气科技工业园
邮编：311243
电话：0571-82583188 82582309
传真：0571-82582108 82582877
电子邮件：qre@qre.com.cn;intl@qre.com.cn
网址：www.qre.com.cn

Add: Qian Tang River Electric Science & Technology Industrial Zone,
XiaoShan District, Hangzhou, China
Post code: 311243
Tel: +86-571-82583188, 82582309
Fax: +86-571-82582108, 82582877
E-mail: qre@qre.com.cn; intl@qre.com.cn
Web: www.qre.com.cn



目录

CONTENTS

产品概述	2
Product Overview	
产品特点	
Product Characteristic	
型号说明	3
Model Coding	
产品结构及代号	
Product structure and coding	
正常使用环境条件	5
Ambient conditions	
主要技术参数	
Technical Parameters	
主要回路一次方案图	7
Primary proposal of main circuit	
变电站外形尺寸、安装尺寸等参数(仅作参考)	9
Outline dimension, installation dimension of substation (For reference only)	
主要回路一次方案图	11
Primary proposal of main circuit	
产品应用领域	12
Applications	
订货需知	
Order Instructions	
服务承诺	13
Service Guarantee	

预装式变电站

Prefabricated Substation



产品概述

本公司生产的24kV及以下预装式变电站系列产品是一种集高压开关设备、变压器、低压配电设备、低压智能开关、功率因数自动补偿、按一定接线方案组合一体的具有就地或远程操作达到遥控、遥测、遥信、遥调等功能的成套配电设备。

本产品适用于额定电压为24kV及以下，额定频率为50Hz的三相交流系统的公共配电网，环网或终端供电的住宅小区，厂矿企业、大型工地、高层建筑、机场码头及临时设施等场所。

该产品能达到一、二次系统的集成化，建设过程的工厂化和施工的简单化，该组合电器集国内箱式变电站，美式箱变，欧式箱变等功能于一体。

ZYB系列变电站内部高、低压开关控制方式有手动、电动操作方式，也可以远程控制，并具有事故及报警显示和电气参数测量、通讯、电度量计等功能。

产品特点

本系列产品具有占地面积小、结构紧凑、造型美观、现场安装工作量小、安装调试周期短、运行安全可靠、检修方便、根据实际需要可移动位置等功能。

外壳参照国外先进技术并根据实际情况进行设计。具有牢固、隔热通风、性能好、防尘、防小动物等特点。外壳材料有多种选择。如：钢板、铝合金板、复合板、不锈钢板、非金属材料及覆铝锌板加饰木条的材料等。

产品除可采用油浸式的全密封变压器外，还可采用干式变压器、卷铁芯变压器、非晶合金变压器等。

高压开关柜采用HXGN等国产系列柜，亦可安装ABB或RM6等进口开关柜。

低压开关柜采用GGD或GCK等配电装置，高低压一次回路可根据用户要求进线选择布置。

Product Overview

The prefabricated substation with voltage up to 24KV is a set of high-voltage switchgear, transformers, low voltage power distribution equipment, low-voltage intelligent switch, automatic reactive power compensation, combined according to a certain combination of connection to offer local or remote operation to realize the functions of remote control, remote measuring, remote communication, remote adjustment.

This product applies to rated voltage of 24kV and below, rated frequency of 50Hz AC three-phase system of public distribution system, RMU or the residential quarters, factories and mines, large construction sites, high-rise buildings, airport terminals and temporary facilities, etc.

This product integrates primary and secondary systems to simplify the installation and commissioning. It's combined functions of pad-mounted transformer and prefabricated substation.

The Control method of ZYB series substation includes manual & electric operation type, as well as remote control type. It also has function of metering, communicating, controlling, alarm etc.

Product Characteristic

This series of products are compact, elegant, easy for installation, commissioning & maintenance, removable and reliable in operation.


The kiosk can be customized while IP grade according to IEC standard. Material of kiosk can be steel, aluminum, ABS, stainless steel, etc.

Other than oil immersed hermetical transformer, we also can adopt dry type transformer, roll core transformer and amorphous transformer,

H.V. switchgear adopts HXGN serial panel as usual while ABB & RM6 panel are also available.

L.V. switchgear adopts GGD or GCK panel. The layout of HV & LV primary circuit can be customized.

型号说明 Model Coding

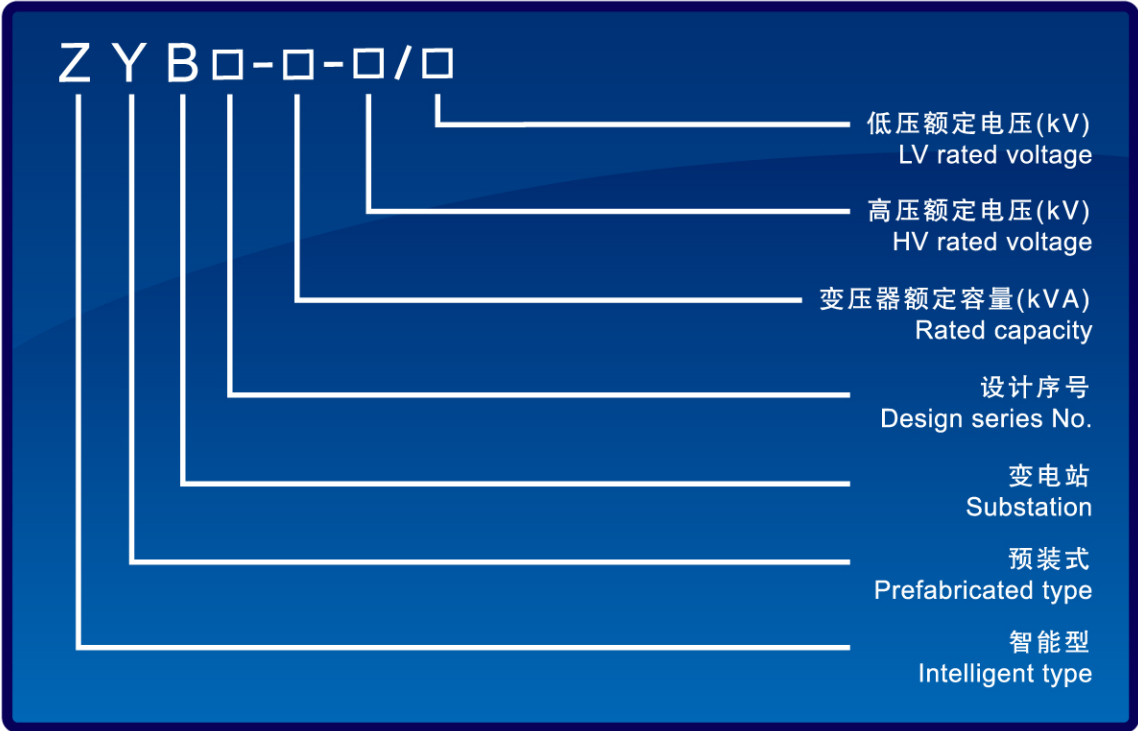

产品结构及代号 Product structure and coding



ZYB11-敞开型
Open type

高压室 H.V.chamber	变压器 Transformer
低压室 L.V.chamber	



ZYB12-通道型
Channel type

高压室 H.V. chamber	变压器室 Transformer	低压室 L.V.chamber
		通道走廊 Passage
		低压室 L.V.chamber



ZYB13-L字型
“L” type

变压器 Transformer	高压室 H.V.chamber
低压室 L.V.chamber	



ZYB15-翻盖型
Flip type

高压室 H.V.chamber	变压器室 Transformer	低压室 L.V.chamber
--------------------	---------------------	--------------------



ZYB16-目字型
Coupled “F” type

高压室 H.V. chamber	变压器室 Transformer	低压室 L.V. chamber
------------------------	---------------------	------------------------



ZYB17-沉箱型
Caisson type

高压室 H.V. chamber	变压器室 Transformer	低压室 L.V. chamber
------------------------	---------------------	------------------------



ZYB18-品字型
“O”+reversed “E” type

变压器 Transformer	高压室 H.V.chamber
	通道走廊 Passage
	低压室 L.V.chamber

正常使用环境条件 Ambient conditions

- 1.变电站周围空气温度最高不超过40℃，最低不低于-25℃。
 - 2.海拔高度不超过1000m。
 - 3.空气湿度不大于90%（+20℃）。
 - 4.户外风速不超过35m/s。
 - 5.无导电尘埃，无爆炸危险，无腐蚀危险，无腐蚀金属的气体场所。
 - 6.倾斜度不超过3°，无剧烈振动及无冲击的场所。
 - 7.已采用高燃点绝缘油，外表用防污涂装处理，可适用于各种恶劣环境。
 - 8.特殊使用条件可进行特殊设计。
- 1.Ambient air temperature $\leq 40^{\circ}\text{C}$, but $\geq -25^{\circ}\text{C}$.
 - 2.Altitude $\leq 1000\text{m}$.
 - 3.Humidity $\leq 90\%$ (+20℃).
 - 4.Outdoor wind speed $\leq 35\text{m/s}$.
 - 5.In sites of no conductive dust, no risk of explosion, no corrosion risk, no corrosive gas to metal.
 - 6.Vertical tilt $\leq 3^{\circ}$, no severe vibration and shock-free place.
 - 7.Applies high ignition insulation oil; outer surface is process by "three protection" and treatment by cathodic electrophoretic coating powder, which is suitable for all kinds of severe environment.
 - 8.Transformers for special conditions can be specially designed.

主要技术参数 Technical Parameters

- 1.高压侧额定电压：Un1=24kV、12kV、10kV、6.3kV（或根据用户要求）。
 - 2.低压侧额定电压：Un2=690V、400V、230V（或根据用户要求）。
 - 3.变压器额定容量（10kV为例）与一、二次电流及高压熔断器，低压主断路器参数见表1。
- 1.Rated voltage on HV side: Un1=24kV, 12kV, 10kV, 6.3kV (Or as per client's requirement)
 - 2.Rated voltage on LV side: Un2=690V, 400V, 230V (Or as per client's requirement)
 - 3.Specification of transformer rated capacity (10kV) and primary, secondary current & HV fuse, LV main circuit breaker refers to table 1.

表1 Table 1 （主要技术参数表）(Key technical specification)

变压器额定容量 Transformer rated capacity	一次电流（10kV） Primary current (10kV)	一次电流（0.4kV） Secondary current (0.4kV)	高压熔断器电流 Current of HV fuse	低压主断路器电流 Current of LV main circuit breaker
Sn(kVA)	I1(A)	I2(A)	(A)	In(A)
80	4.6	115	8	125
100	5.8	144	12	160
125	7.2	180	14	250
160	9.2	231	16	250
200	11.5	289	20	400
250	14.4	361	25	400
315	18.2	455	31.5	630
400	23.1	577	40	630
500	28.9	722	50	800
630	36.4	909	63	1000
800	46.2	1160	80	1250

备注：可根据用户要求的容量生产。 Notes: Special capacity can be fabricated as per client's requirement.

4.高压主要技术参数见表2

Key specification of HV refers to table 2

表2 Table 2

项目 Items	单位 Unit	参数 Values
额定电压 Rated Voltage	kV	10(6.3)
额定最高电压 Rated max. voltage	kV	12(7.2)
额定频率 Rated Frequency	Hz	50
额定电流 Rated Current	A	630
额定短时耐受电流 Rated short time withstanding current	kA	20/2s 20/3s
额定峰值耐受电流 Rated withstanding current (Peak)	kA	50
额定短路开断电流 Rated short circuit breaking current	kA	50
额定工频耐受电压对地及相间/断口间 Rated power frequency withstanding voltage to earth and inter-phase/breaking points	kV	42/48(1min)
额定耐受冲击电压对地及相间/断口间 Rated impulse withstanding voltage to earth and inter-phase/breaking points	kV	75/85(1min)

5.低压主要技术参数见表3

Key specification of LV refers to table 3

表3 Table 3

项目 Items	单位 Unit	参数 Values
额定电压 Rated voltage	V	690、400、230
主回路额定电流 Rated current for main circuit	A	100以上
额定动稳定电流 Rated dynamic stable current	kA	30, 50
额定热稳定电流 Rated thermal stable current	kA	30/1s, 50/1s

6.其它技术参数见表4

Other specification refers to table 4

表4 Table 4

项目 Items	单位 Unit	参数 Values
外壳防护等级 Protection level of enclosure		IP33（或根据用户要求） IP33 (or as per client's requirement)
声级水平 Noise level	dB	油变 ≤ 65 (Oil immersed transformer: ≤ 65) 干变 ≤ 77 (Dry type transformer: ≤ 77)

主要回路一次方案图 Primary proposal of main circuit

1.高压一次回路方案

高压可采用国产以及进口环网柜（施耐德、ABB、西门子等）。

HV Primary Circuit Scheme

High voltage can adopt home made or inmorted ring cabinet（Schneider,ABB,Siemens. etc.）。

01	02	03
一进一出 one in-one out	一进二出 one in-two out	二进二出 two in-two out
04	05	06
一进三出 one in-three out	一进四出 one in-four out	二进三出 two in-three out

2.低压一次回路方案（典型方案）

LV Primary Circuit Scheme（Typical proposal）

01	02	03
主开关 Main switch	MT or NSE	MT or NSE
回路数 No. of ways	5~8	5~8
电容补偿 Capacitor compensation	8~160kVar	8~160kVar
04	05	06
主开关 Main switch	MT or NSE	MT or NSE
回路数 No. of ways	n_10 14	n_10 14

注：1.配件根据用户需要另行选择

2.低压配置其他方案可根据用户要求生产

Note: 1.Fittings can be selected as per customer's special requirements.


2.LV allocation scheme as per customer's special requirements.

变电站外形尺寸、安装尺寸等参数(仅作参考)

Outline dimension, installation dimension of substation (For reference only)

A.目字型
Coupled "F" type

1.安装尺寸图
Installation Dimensions

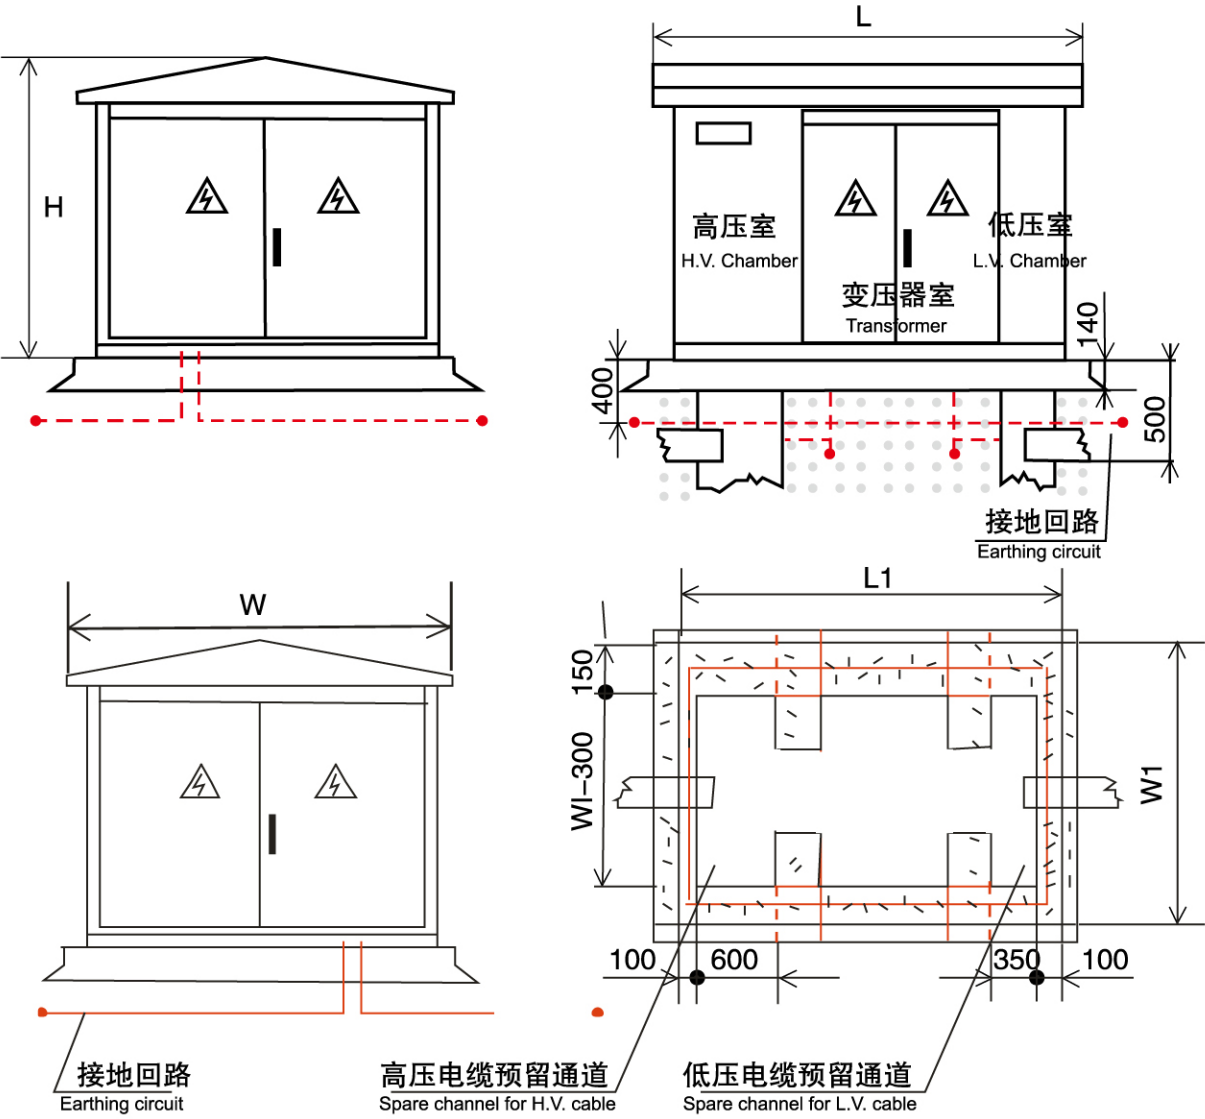


2.外形尺寸及其他参数 (以-16型为例)
Dimensions and Other Parameters

型号规格 Model	外形尺寸 (mm) Outer Dimensions	占地面积(m²) Areas occupied	体积(m³) Volume	重量(MT) Weight
ZYB16-400-10/0.4	L=2570;L1=2450;W=1860;W1=1700;H=1800	4.12	7.62	4.2
ZYB16-500-630-10/0.4	L=2670;L1=2550;W=2060;W1=1900;H=1950	4.85	9.70	5.0
ZYB16-800-1000-10/0.4	L=2870;L1=2750;W=2360;W1=2200;H=2200	5.71	12.28	5.3

B.品字型
"O"+reversed "E" type

1.外形尺寸
Outer Dimensions

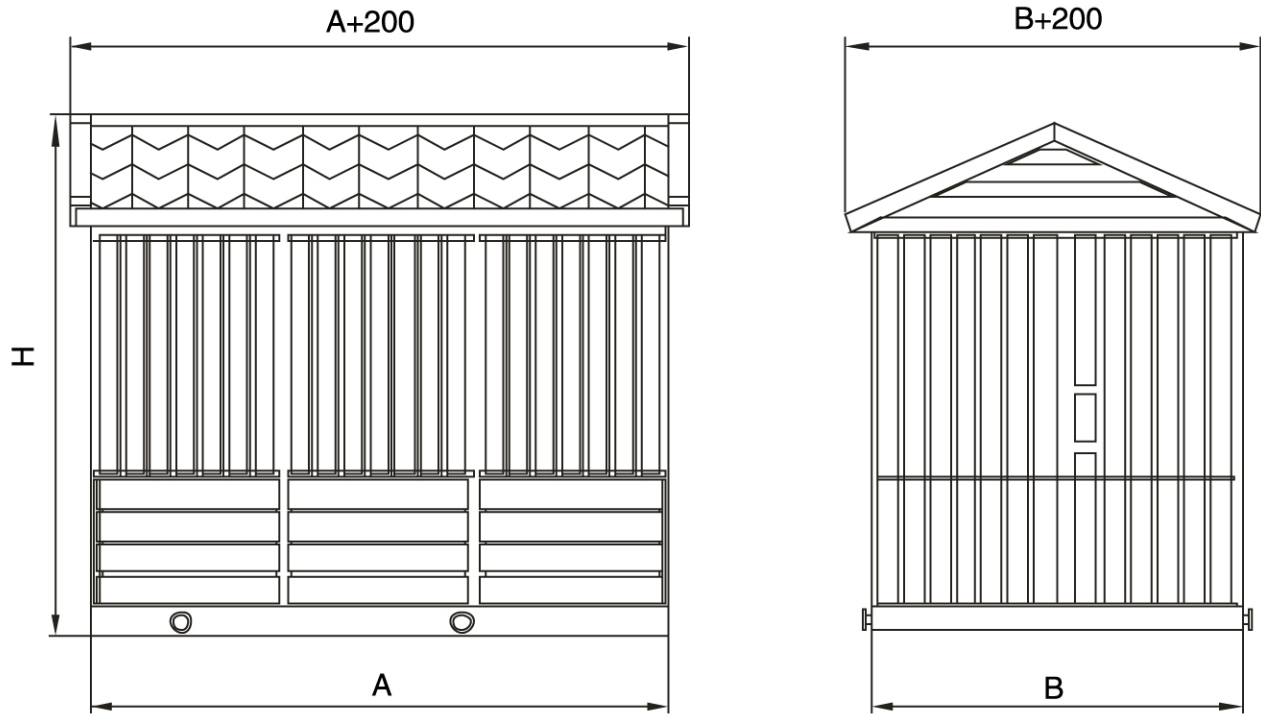

变压器容量 (kVA) Rated capacity of transformer	高压回路RM6 H.V. Circuit	A(mm)	B(mm)	H(mm)
500-630	三进一出 (包括两进一出, 一进一出) 3 in-1 out (including 2 in-1 out, 1 in-1 out)	3300	2100	2450
800		3500		
500-630	四进一出 4 in-1 out	3700		
800				

- 2.接地网安装要求:
- (1) 接地体埋设深度不小于0.6米;
 - (2) 接地体双面焊接, 焊口涂防锈漆;
 - (3) 接地网电阻测试必须小于4欧姆;
 - (4) 整机采用三相五线制。


Requirement of earthing net installation:

- 1.The burial depth no more than 0.6 m from the toimt of connecting the land。
- 2.The connecting the land should be welded for both sides,the mouth of which should be daubed the antrirust.
- 3.The resistance of connecting the land must be smaller than 4 Ω.
- 4.Applies three-phase five-wire system.

主要回路一次方案图 Primary proposal of main circuit

3.基础图 MK1、MK2、MK3外壳地基图

MK1、MK2、MK3 Enclosure Foundation Diagram

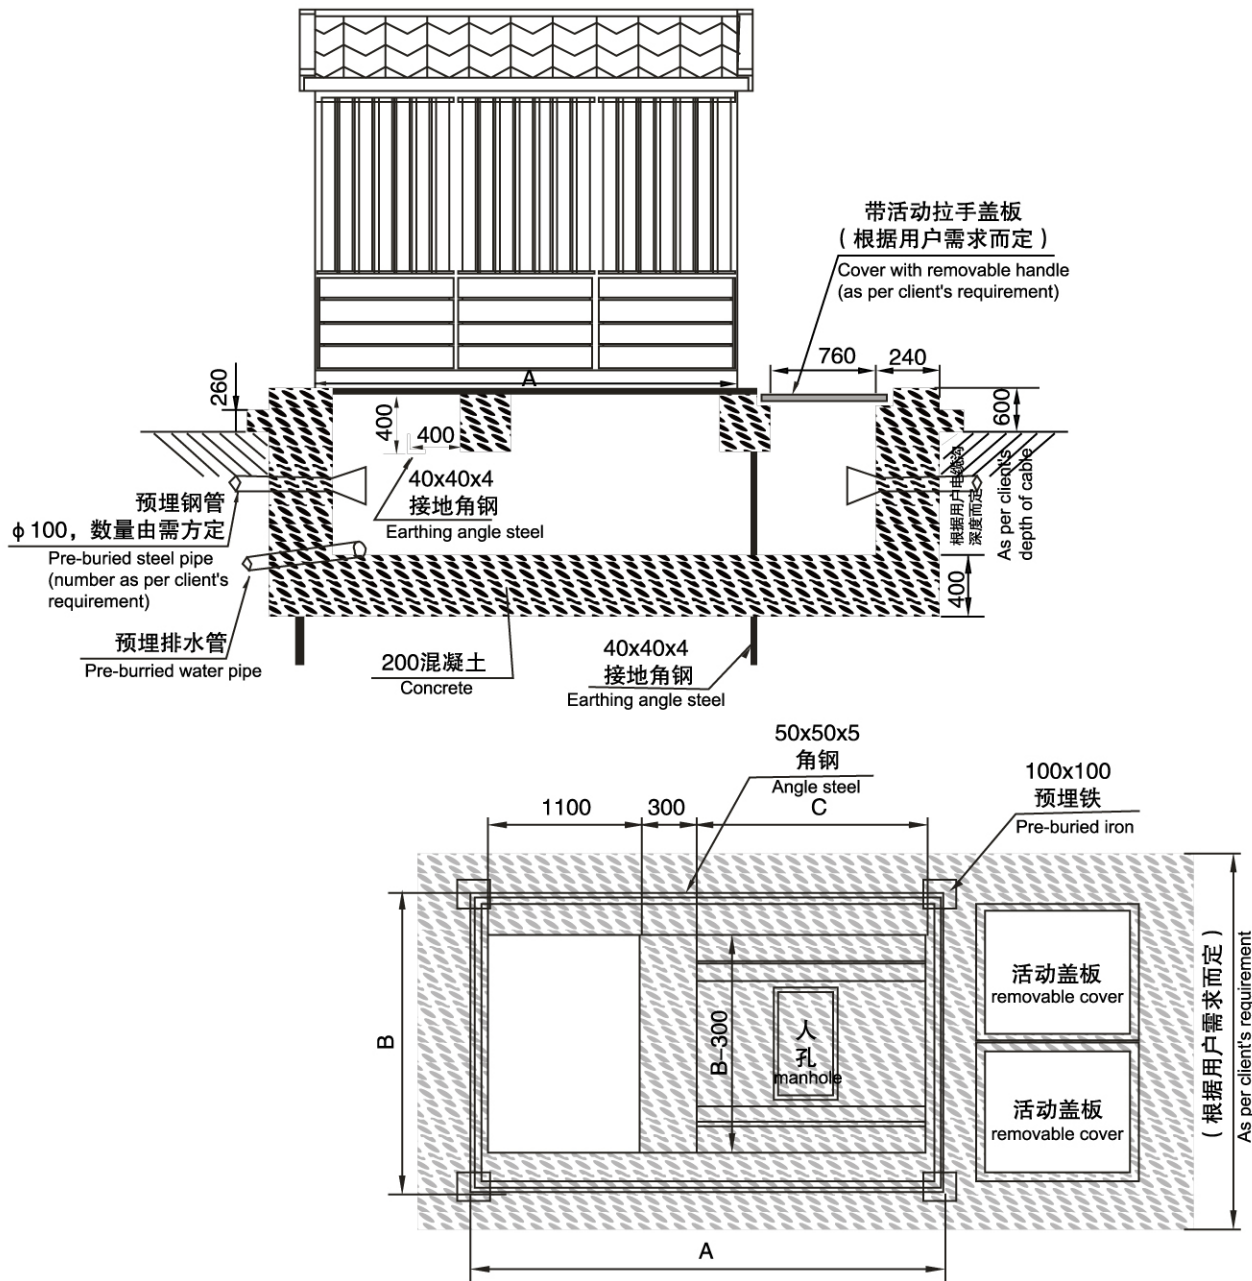

产品应用领域

该产品应用于人口密集的中心城区、街道、高速公路、桥梁、隧道、停车场、机场、港口、旅游景点，别墅、花园小区等。



Applications

The center of densely populated urban areas, streets, highways, bridges, tunnels, car parking, airports, sea ports, tourist attractions, villas, garden district, etc.



订货需知

- 1、变电站型号，结构形式，壳体材料选用要求。
- 2、高低压回路主接线方案，元器件型号，规格要求。
- 3、变压器型号和容量、联接组别。
- 4、变电站内部布局、外形、颜色的选择和要求。
- 5、如有特殊要求，双方协商解决。

Order Instructions

- 1.Type, structure, material of enclosure.
- 2.Main circuit plan for H.V. & L.V., specification of components.
- 3.Specification of transformer such model number, capacity, voltage ratio.
- 4.Arrangement of substation, features, color.
- 5.Special requirement to be discussed.

A	B	C
3300	2100	1600
3500	2100	1800
3700	2100	2000

服务承诺

- 1.及时向顾客提供按合同规定的全部技术资料和图纸。有义务在必要时邀请顾客参与供方的技术设计审查。
- 2.按顾客要求的时间到现场进行技术服务，指导顾客按供方的技术资料和图纸要求进行安装、调试与整套试运及试生产。
- 3.对于顾客选购的与合同设备有关的配套设备，我方主动提供满足设备接口要求的技术条件和资料。
- 4.严格执行供需双方就有关问题召开会议纪要或签订的协议。
- 5.按合同规定为顾客举办有关设备安装、调试、使用、维护技术的业务培训班。
- 6.加强售前、售中、售后服务，把“24小时服务”、“超前服务”、“全过程服务”、“终身服务”贯彻在产品制造、安装、调试、修理的全过程。
- 7.随时满足顾客对备品备件的要求。

Service Guarantee

- 1.To provide all technical information and drawings as per contract promptly. QRE is oblided to invite client, if neccessary, to attend technical design review.
- 2.To carry out spot technical service as per client's sche-dule, offer guideness for installation and commission-ing according to technical information and drawings.
- 3.For relevant auxiliary equipment procured by customers, QRE will provide related technical information to meet requirement of equipment interface.
- 4.To execute stipulations in MOU or agreement signed by seller and buyer strictly.
- 5.To train staff from client for equipment installation, commissioning, application, maintenance as stipulated in the contract.
- 6.To reinforce pre-sales, mid-sales, after-sales service, to carry out “24-hour service” , “service in advance” , “overall process service” , “lifelong service” in our manufacturing, installation, commissioning and main-tance.
- 7.To meet spare parts'requirement by customers at any time.

■ 尊敬的用户朋友,如果您有服务需求,可以发送Email给我们,或者直接电话与我们联系:
用户服务中心:0571-82583638, 0571-82583088, 0571-82583928
传 真: 0571-82583618, 0571-82582309

Dear clients, if there is any enquiry or requirement, please feel free to send email: intl@qre.com.cn
or make phone call directly to service center:
+86-571-82583638, 82583088, 82583928
Fax:+86-571-82583618, 82582309